

VERSALITE LV Series

Variable-Speed Portable Conveyor System

The VersaLite LV Series conveyor combines durability, portability and versatility all in one affordable package. This slider-bed belt conveyor is designed to handle light to medium loads (125lb(57Kg) per 16ft(4.9meter) section). The conveyors are either configured as Masters or Slave sections. The slave sections plug into the master section which is wired with the variable speed control. Up to eight 16ft. slave sections can be connected together and be controlled(on/off, forward/reverse, and speed) by the master section.



Features:

- Made from corrosion resistant materials: aluminum frame, stainless steel pulleys and UHMW plastic slider bed.
- NEMA 4 watertight electrical enclosures and connections.
- One Master conveyor section can control up to 8 slave conveyor sections (147 feet total)
- Low cost per linear foot of conveyor.
- Can be set-up and taken-down quickly
- Can be angled up to 20 degrees up or down at each connection
- Small diameter (1.25") pulleys allow for easy transfer of small items from one conveyor section to another.
- One year Limited Warranty

Specifications:

- Input Voltage: 120VAC
- Variable-speed, reversing DC motor control
- Motor: Leeson Gearmotor 1/17HP 90VDC
- Load Capacity(per 16'conveyor): 125lb (57Kg)
- Bed Type: UHMW slider bed
- Belt Width: 10"(25cm)
- Maximum Belt Speed: 50 feet per minute(15.2 m/min)
- Standard lengths: 8'4" (2.54m) and 16'4" (4.98m)
- Weight
 - Per 8 foot section: 55 lbs. (25Kg)
 - Per 16 foot section: 75 lbs. (34Kg)

Made In



The USA

Randall Tool & Manufacturing
2514 Port Sheldon Rd.
Jenison, MI 49428
Phone:616-669-1260
Fax:616-797-0220
Web:www.randalltool.com
Email: aaron@randalltool.com or
randy@randalltool.com

**Randall Tool &
Manufacturing**
"Quality Manufacturing Since 1972"

VERSALITE LV Series

How It Works


There are two different classes of conveyor: master and slave. The master conveyor is a complete conveyor by itself. It has its own motor and control and can be used as a stand-alone unit. The slave conveyor has its own motor but has no controller. It must be connected electrically to a master conveyor in order to run. Up to 8 slave sections may be controlled by a master for a total of 147'. (when using 16'4" sections)

Available in 16'4" and 8'4" sections standard(custom sizes are available). The VersaLite LV Series is built to handle high moisture environments, so it can be used in the Greenhouse or even outdoors. All electrical connections are NEMA 4 rated waterproof sealed. The conveyor is built almost exclusively from corrosion-resistant materials. The conveyor frame is aluminum. The end pulleys are stainless steel. The slider bed is made of UHMW polyethylene. The only steel on the conveyor is in the fasteners and the double-sealed ball bearings.


The VersaLite LV Series is easy to setup and move. First, set up your stands. (Two stands are required for each section.) Second, set your master conveyor at one end of your run. Third, set your slave sections on your stands while placing the tail end(the end opposite the motor) of each conveyor into the cradle bracket of the previous conveyor.(picture A) Fourth, using the quick connect DC connectors. (picture B) plug in the first slave to the master, and plug in each slave after that to the previous slave. Finally, plug in your master to 120VAC, switch on the control, and dial in your speed.



A. Conveyor Sections drop

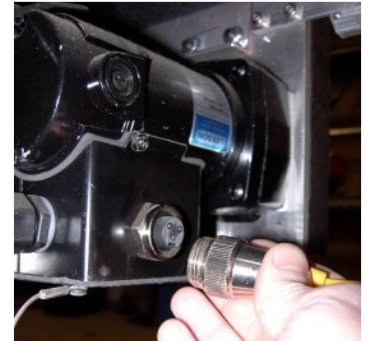

B. Quick-connectors connect

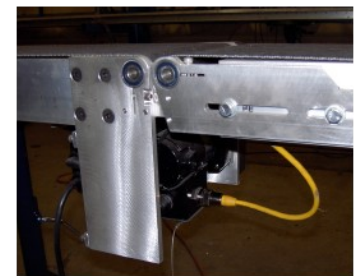

C. Connected conveyor Sections

Versalite LV Series Price List

*Purchase 5 or more sections and receive a 5% discount.

Part#	Description	Notes	Price
Conveyors			
VLV-8M	VERSLITE L-SERIES 8' MASTER CONVEYOR SECTION	Conveyor with control; Can be used alone; Actual conveyor length is approximately 8'4"	\$1,665.00
VLV-8S	VERSLITE L-SERIES 8' SLAVE CONVEYOR SECTION	Requires master conveyor section; Actual conveyor length is approximately 8'4"	\$1,263.00
VLV-16M	VERSLITE L-SERIES 16' MASTER CONVEYOR SECTION	Conveyor with control; Can be used alone; Actual conveyor length is approximately 16'4"	\$1,894.00
VLV-16S	VERSLITE L-SERIES 16' SLAVE CONVEYOR SECTION	Requires master conveyor section; Actual conveyor length is approximately 16'4"	\$1,493.00
Accessories			
VL-A05	ADJUSTABLE TRIPOD STAND	Adjustable from 26" to 42" (to top of conveyor)	\$60.00

*Prices subject to change. Listed prices good as of July 7, 2010

Other available options: 90° turn kit, low stands, DC extension cords (used for right angle and other special configurations.), add-on control (for turning a slave into a master). Full price list available on website.